



For indoor use only SPECIFICATION

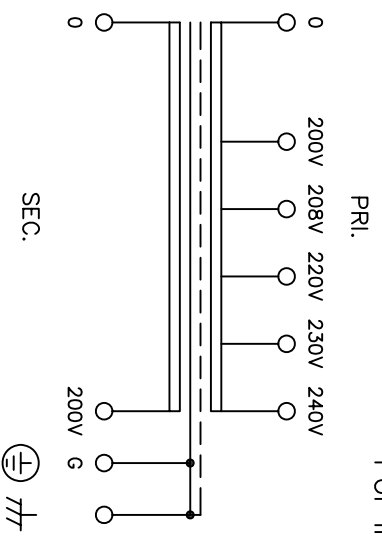

STANDARD	EN61558-2-4	UL 506
MODEL	FUL22-200	
PHASE	(Φ)	1
FREQUENCY	(Hz)	50/60
CAPACITY	(VA)	200
PRI. VOLTAGE	(V)	200 208 220 230 240
SEC. VOLTAGE	(V)	200
SEC. CURRENT	(A)	1
PERCENT IMPEDANCE	(%)	6.8/6.8
DIELECTRIC STRENGTH (V/min)	P-S,G	4200
	S-G	4200
INSULATION RESISTANCE		2500
		more than 100 MΩ at DC 500V Megger
RATING	CONTINUOUS	
CLASS	F (SYSTEM 14)	
MASS	(kg)	4.4
MAX. AMBIENT TEMP.	(°C)	40
MAX. TEMP. RISE	(K)	100
PRI. CIRCUIT BREAKER	2A (EN60947-2)	100
SEC. CIRCUIT BREAKER	1A (EN60947-2)	
PROTECTION DEGREE	IP00	
IEC MARK	IP00	
TUV & CE MARK		
UL MARK		
UL FILE No.	E252316	

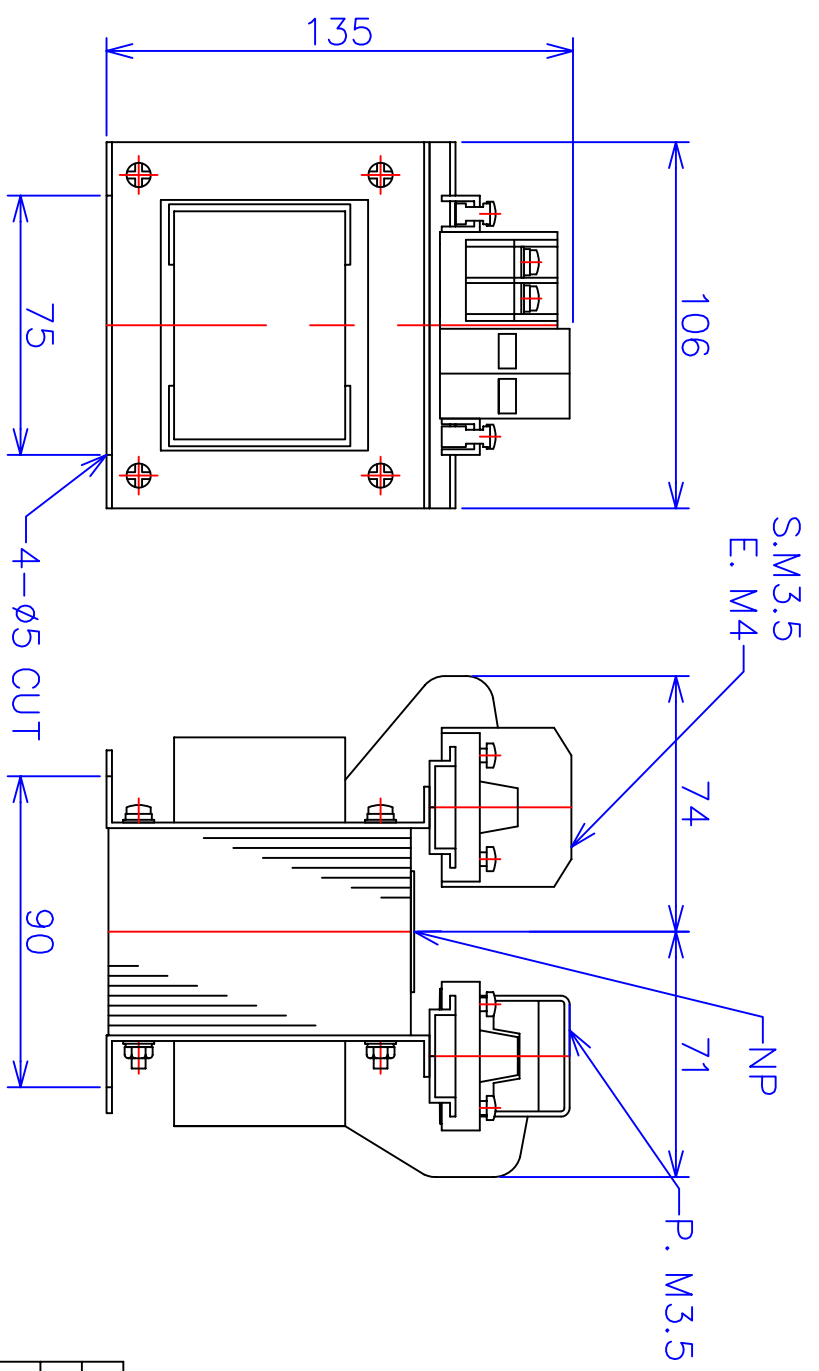

1	Geographical plot of a rated nameplate	2008/03/13
MARK	DESCRIPTIONS	DATE
REVISIONS		
NAME	DATE	SCALE

DRAWN BY	K. Tamura	2006/12/20	TITLE	TRANSFORMER
CHECKED BY	K. Tamura	2006/12/20	DRAWING No.	T-42768-200-M
FUKUDA ELECTRIC WORKS CO., LTD.				